XGT

40V Li-ion max

Beautiful finish

Cordless 18 Ga
40 mm (1-5/8")
Brad Nailer

Work volume on a single full battery charge

about **5,000** nails

with battery: BL4025
nail: Length 15-40 mm,
Gauge 18 Ga

BL MOTOR **XPT**

XGT 40Vmax Li-ion

40Vmax series

40Vmax mechanism

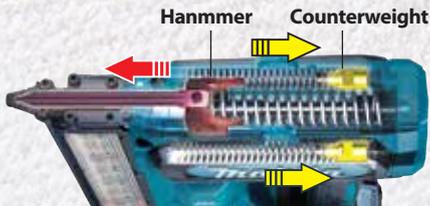This movie was filmed in Japan. Models and specs may vary by country.

High power BL MOTOR

40Vmax XGT Li-Ion battery and BL motor quickly re-compress the spring for next firing.

Counterweight mechanism

reduces vibration by moving a counterweight in the opposite direction of the hanmmer.

Hanmmer   Counterweight

Tough spring

Compact and lightweight design
for high maneuverability

Lightweight at 2.6kg
(with BL4020)

243mm

Contact top designed for easy nail placement

Nail shooting port is located in the center of contact arm, enabling accurate nail placement.

Slim nose with nose adapter

4mm

Driving depth adjustment

LED job light

XPT
eXtreme Protection Technology

Accessories

Nose Adapter S
Part No. 422665-2

Battery Charging Time Reference

40Vmax	DC40RA Fast Charging
BL4050F 5.0Ah	**50min**
BL4040 4.0Ah	**45min**
BL4025 *1 2.5Ah	**28min**
BL4020 *1 2.0Ah	**22min**

*1 Recommended battery

Cordless Brad Nailer — FN001G

- 123 Depth Adjustment
- Auto Firing Stop
- Built-in Job Light
- Carrying Case

Capacity	Length: 15, 20, 25, 30, 35, 40 mm (5/8, 3/4, 1, 1-3/16, 1-3/8, 1-5/8")
	Gauge: 18 Ga
Magazine Capacity	100
Shot q'ty on a single full battery charge	w/ BL4025: 5,000
Vibration Level	2.5 m/s² or less
Sound Pressure Level	81 dB(A)
Sound Power Level	92 dB(A)
Dimensions (L x W x H)	w/o Battery: 234 x 86 x 243 mm (9-1/4 x 3-3/8 x 9-9/16")
	w/ BL4020 / BL4025: 265 x 86 x 243 mm (10-3/8 x 3-3/8 x 9-9/16")
	w/ BL4050F: 291 x 86 x 263 mm (11-1/2 x 3-3/8 x 10-3/8")
Net weight	2.6 - 3.2 kg (5.7 - 7.1 lbs.)

Standard Equipment :

FN001GZ : Hook: 346317-0(1), Nose adapter S: 422665-2(1), Hex. wrench 3: 783201-2(1).
FN001GD101: Plastic case complete: 141A98-5(1), Battery BL4025: 191B41-0(1), Hook: 346317-0(1), Nose adapter S: 422665-2(1), Hex. wrench 3: 783201-2(1), Fast Charger DC40RA(1)

Makita Power Tools India Pvt. Ltd.
Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in