


High Power
Durability
Digital
Communication



High Speed cutting **20%* UP**

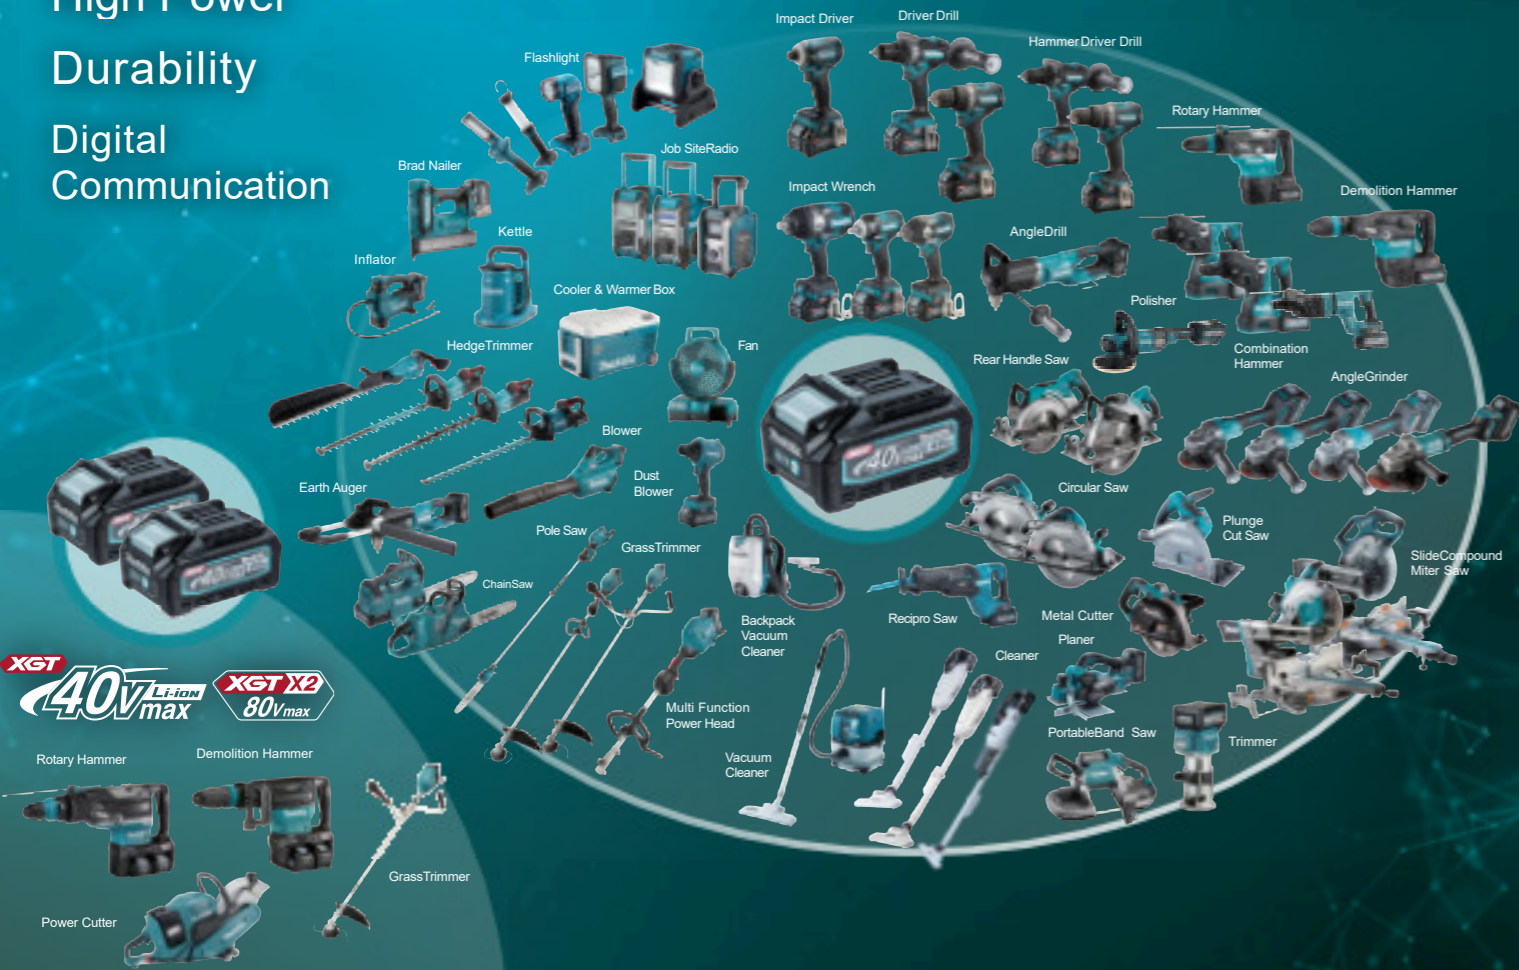

Max cutting capacity
67 mm

Accessories

T.C.T Saw Blade

Size: 185mm x 20mm

Cutting Material	No. teeth	Kerf (mm)	Plate (mm)	Part No.
Metal	45T	1.4	1.2	E-12918
SUS/Metal	60T	1.4	1.2	E-12924
Thick metal	38T	1.4	1.2	E-14320



Charging Time

Battery	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Metal Cutter	CS002G 185 mm (7-1/4")
Brake	Wheel Diameter 185 mm (7-1/4")
Soft Start	Max Cutting Capacity 67 mm (2-5/8")
Constant Speed	No Load Speed (RPM) 3,500
Built-in Job Light	Sound Pressure Level 102dB(A)
Anti-restart function	Sound Power Level 113dB(A)
	Vibration Level 2.5m/s ² or less
	Dimensions 350 x 232 x 270 mm
	(L x W x H) (13-3/4 x 9-1/8 x 10-5/8")
	Net weight 4.2 - 5.4 kg (9.3 - 11.9 lbs.)
Standard Equipment : CS002GZ: Guide rule: 164095-8(1), Hex. wrench 5: 783203-8(1), EFFICUT METAL FOR METAL CUTTING: E-12918(1)	

BL MOTOR

High operating efficiency



Cutting speed
20% UP

Metal cutting speed

CS002G **120**

Predecessor ACmodel **100**

slow speed fast

CS002G
Battery: BL4040
Material: Cut lip channel steel bars (100x50mm, t=3.2mm)
Blade: EFFICUTMETAL185mm 45T

Cutting work amount


Work volume on a single full battery charge

About **140** cuts

Battery: BL4040
Material: Cut lip channel steel bars (100x50mm, t=3.2mm)
Blade: EFFICUTMETAL185mm 45T

Constant speed control

minimizes the reduction in blade speed to provide stable cutting.

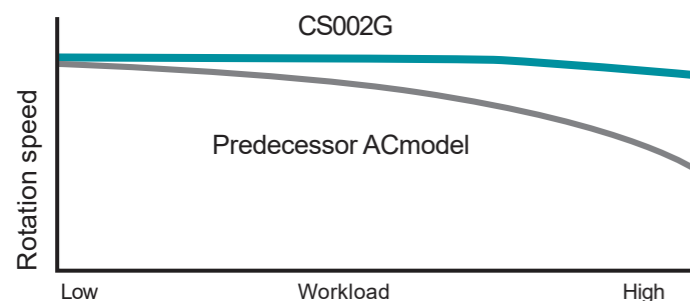

The same cutting capacity as a 203mm (8") class corded model



Max cutting capacity

67 mm



Improvement in ease to attach/detach Dust box



using a mechanism which allows for attaching/detaching simply by one-hand operation of a plastic lever.



Electric brake



eXtreme Protection Technology

