

Makita

Cordless Pole Saw
DUA250 / DUA251 250mm (10")
DUA300 / DUA301 300mm (12")



* These models are not compatible with Portable Power Pack (PDC1200, PDC01) / Only rear handle type chainsaws are compatible

Optional Accessories

Guide bar / Sawchain / Guide bar cover

Cutter type: MC: Micro chisel, CC: Chamfer chisel

Guide Bar				Saw Chain						Bar Cover	Drive sprocket			
Bar length	Motor Mount	Type	Part No.	No.ofdrive links	gauge	pitch	Type OREGON/ DOLMAR	Cutter type	Part No.	Part No.	Type	Part No.		
25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/ .043"	3/8"LP	90PX/ 291	CC	191H00-0	458501-6	Sprocket 3/8"LP	226992-7		
30cm/12"			191G15-1	46					191H01-8	419288-5				
25cm/10"			191G22-4	40	1.3mm/ .050"		91PX/ 492		191H08-4	458501-6				
30cm/12"			191G23-2	46					191H10-7	419288-5				

Band assembly set

Part No.
191K37-5



Portable Power Pack

PDC1200

Powered by
36V-40Vmax
built-in
battery



PDC01

Powered by
up to four
18V LXT
batteries



Adapter set (18Vx2)
Part No. 191J51-5



Charging Time

	DC18RD
BL1815N 1.5Ah	15 min
BL1820B 2.0Ah	24 min
BL1830B 3.0Ah	22 min
BL1840B 4.0Ah	36 min
BL1850B 5.0Ah	45 min
BL1860B 6.0Ah	55 min

Cordless Pole Saw

DUA250 / DUA251 250 mm (10") DUA300 / DUA301 300 mm (12")

	DUA250 / DUA300	DUA251 / DUA301
Variable Speed	Variable Speed	Variable Speed
Brake	Brake	Brake
Soft Start	Soft Start	Soft Start
Guide Bar Length	DUA250: 250 mm (10") DUA300: 300 mm (12")	DUA251: 250 mm (10") DUA301: 300 mm (12")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 /min) (0 - 3,940 FPM)	0 - 20.0 m/s (0 - 1,200 /min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL	160 mL
Vibration level (Front / Rear)	1.6 / 1.2 m/s ²	Not extended: 2.6 / 2.2 m/s ² Extended: 2.8 / 2.3 m/s ²
Noise level	103 dB(A)	105 dB(A)
Dimensions (L x W x H)*	2,238 x 155 x 191 mm (88 x 6-1/8 x 7-1/2")	2,530 - 3,762 x 155 x 191 mm (99-1/2 - 148 x 6-1/8 x 7-1/2")
Net weight	6.1 - 6.8 kg (13.5 - 15.0 lbs.)	7.8 - 8.4 kg (17.2 - 18.5 lbs.)
*without guide bar		

Standard Equipment : DUA300Z: Guide bar: 165245-8(1), Saw chain 12: 191H01-8(1), Band assembly: 191K37-5(1), Oil vessel: 199897-3(1), Chain cover: 419288-5(1)
DUA300PT2: Guide bar: 165245-8(1), Saw chain 12: 191H01-8(1), Band assembly: 191K37-5(1), Oil vessel: 199897-3(1), Chain cover: 419288-5(1), BL1850B: 198013-4(2), TWO PORT FAST CHARGER: DC18RD(1)

Efficient cutting with ease

250mm (10")


DUA250 Fixed length

DUA251 Telescopic

300mm (12")

DUA300 Fixed length

DUA301 Telescopic

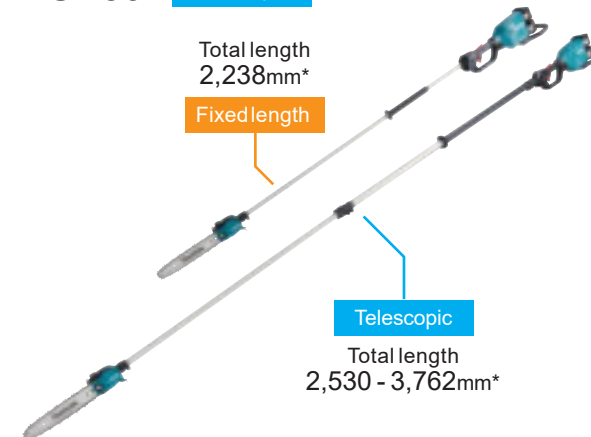

*without guide bar

18V + 18V → 36V

BL MOTOR XPT

Makita

Makita Power Tools India Pvt. Ltd.

Unit 8 Sy. Nos. 93/3 & 93/4, Korulur Village, Kasaba Hobli,
Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in



18v + 18v → 36v

Delivers equivalent performance of 30 mL class engine models

