



Cordless Jig Saw DJV186

Satisfy Professional's Needs

LXT

High cutting efficiency with LXT 18V battery



Lightweight

1.9 kg

With BLB182 battery

18V
LITHIUM-ION

LXT
BASIC

Compact and lightweight

Powerful enough to perform smooth light duty cuts

18V
LITHIUM-ION
LXT
BASIC

Variable speed control by trigger
Makes it easier to align with cutting lines.

Change lever for 3 orbital settings and straight cutting

Optimum cutting action can be selected simply by turning the lever.



Stroke length: 18mm

Blower function



Soft grip

**Powered by 18V LXT
Li-Ion battery**

**Connectable to
a vacuum cleaner**



Rigid aluminum base

Tilts 0° to 45° left and right.



Accessories

Support base set

- Reduces unstable tilting of the blade during bevel cuts, enabling stable cutting.
- Enhances the precision of curved cuts.

Part No. 1915R3-2



Guide rail set

Length	Part No.
1.0m	191J16-7 / 199140-0
1.4m	191J17-5 / 194368-5
1.5m	199141-8
1.9m	194925-9 / 194926-7
3.0m	194367-7



Position sheet set

Length	Part No.
1.4m	191J53-1 / 194418-6
1.9m	194910-2 / 194915-2
3.0m	194419-4



Rubber sheet 10000 set

Part No. 191J54-9 / 194417-8




Push clamp set

Part No. 1913K5-7



Sheet 10000 set

Part No. 194416-0



Guide rail adapter set

For use with guide rails

Part No. 198704-7


Guide rule set

Part No. 192732-4



Kerf board set

Part No. 192557-6




Charging Time

	Fast Charging	
	DC18RC	DC18SD
Not compatible with charger DCB18WA		
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

	LXT BASIC	
	DCB18WA	
Compatible with charger DCB18WA only		
BLB182 2.0Ah	90 min	

Battery and charger compatibility

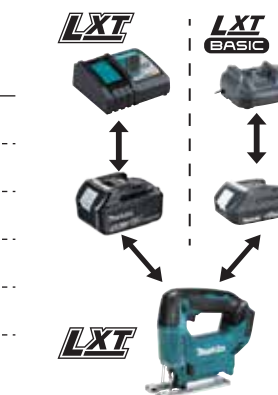

Charge the LXT batteries with the LXT battery chargers and the LXT BASIC battery with the LXT BASIC battery charger.

Cordless Jig Saw DJV186

Variable Speed	Stroke length	18 mm (11/16")
Brake	Strokes per minute	0 - 2,900 min ⁻¹
Orbital Cutting	Capacity	Wood: 65 mm (2-9/16")
Bayonet Shank Jig Saw Blade		Mild steel: 6 mm (1/4")
Dust Collection		Aluminum: 10 mm (3/8")
Carrying Case	Bevel range	0 - 45°
	Vibration level*	Cutting boards: 7.5 m/s ²
		Cutting sheet metal: 4.2 m/s ²
	Vibration K factor*	Cutting boards: 1.5 m/s ²
		Cutting sheet metal: 1.5 m/s ²
	Sound pressure level*	85 dB(A)
	Sound power level*	93 dB(A)
	Noise K factor *	3 dB(A)
	Dimensions (L x W x H)	241 - 257 x 81 x 196 mm
	Battery	(9-1/2 - 10-1/8 x 3-3/16 x 7-3/4")
	Net weight	BLB182 - BL1860B
	Battery	1.9 - 2.2 kg (4.2 - 4.9 lbs.)
		BL1815N - BL1860B

*EN62841-2-11

Standard Equipment : Jig saw blade, Hex wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination are shown in the table.
Items of standard equipment and specifications may vary by country or area.



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk,
Bengaluru - 560 067.
Email: info@makita.in

Website: www.makita.in