

Compact and lightweight

Powerful enough to perform smooth light duty cuts



Variable speed control by trigger
Makes it easier to align with cutting lines.

Soft grip

Powered by 18V LXT Li-Ion battery

Changelever for 3 orbital settings and straight cutting

Optimum cutting action can be selected simply by turning the lever.

Connectable to a vacuum cleaner



Stroke length: 18mm

Rigid aluminum base

Tilts 0° to 45° left and right.



Blower function



Optional Accessories

Support base set

- Reduces unstable tilting of the blade during bevel cuts, enabling stable cutting.
- Enhances the precision of curved cuts.

Part No. 1915R3-2



Guide rail set


Length	Part No.
1.0m	191J16-7/ 199140-0
1.4m	191J17-5/ 194368-5
1.5m	199141-8
1.9m	194925-9/ 194926-7
3.0m	194367-7



Position sheet set

Length	Part No.
1.4m	191J53-1/ 194418-6
1.9m	194910-2/ 194915-2
3.0m	194419-4

Sheet 10000 set
Part No. 194416-0



Rubber sheet 10000 set

Part No. 191J54-9/ 194417-8

Push clamp set
Part No. 1913K5-7



Guide rail adapter set
For use with guide rails

Part No. 198704-7

Guide rule set
Part No. 192732-4



Kerf board set
Part No. 192557-6




Charging Time

Battery	Fast Charging	
	DC18RC	DC18SD
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

Battery	LXT BASIC	
	DCB18WA	
BLB182 2.0Ah	90 min	

Battery and charger compatibility

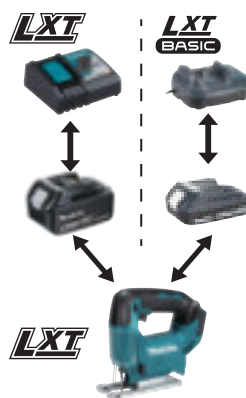

Charge the LXT batteries with the LXT battery chargers and the LXT BASIC battery with the LXT BASIC battery charger.

Cordless Jig Saw

DJV186

Variable Speed	Stroke length	18 mm (11/16")
Brake	Strokes per minute	0 - 2,900 min ⁻¹
Orbital Cutting	Capacity	Wood: 65 mm (2-9/16") Mild steel: 6 mm (1/4") Aluminum: 10 mm (3/8")
Bayonet Shank Jig Saw Blade	Bevel range	0 - 45°
Dust Collection	Vibration level*	Cutting boards: 7.5 m/s ² Cutting sheet metal: 4.2 m/s ²
Carrying Case	Vibration Kfactor*	Cutting boards: 1.5 m/s ² Cutting sheet metal: 1.5 m/s ²
Standard Equipment :	Sound pressure level*	85 dB(A)
DJV186Z:	Sound power level*	93 dB(A)
Hex. wrench: 3 783201-2(1),	Noise Kfactor *	3 dB(A)
JIGSAW BLADE NO: B10 A-85628(1)	Dimensions	241 - 257 x 81 x 196 mm
	(L x W x H)	(9-1/2 - 10-1/8 x 3-3/16 x 7-3/4")
	Battery	BLB182 - BL1860B
	Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)
	Battery	BL1815N - BL1860B

DJV186WVE: Hex. wrench 3 783201-2(1), Plastic case 821938-4(1)
JIGSAW BLADE: NO.B10 A-85628(1), Battery BL182: 1915F6-2(2)
DJV186SFJ: Hex. wrench: 3 783201-2(1), INNER TRAY: 836A35-9(1), Connector plastic case: (type 2) 821550-0(1), JIGSAW BLADE NO.B10: A-85628(1), Battery BL1830B: 197605-6(2), DC18SD BATTERY CHARGER DC18SD(1)

DJV186F001: Hex. wrench 3: 783201-2(1), Connector plastic case (type 2): 821550-0(1), INNER TRAY: 836A35-9(1), JIGSAW BLADE NO.B10: A-85628(1), Battery BL1830B: 197605-6(2), DC18WC BATTERY CHARGER DC18WC(1)



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli, Hoskote Taluk, Bengaluru - 560067
Email: info@makita.in Website: www.makita.in