



Cordless Steel Rod Cutter DSC251

Satisfy Professional's Needs

LXT

Excellent flush cutting

Cut at 3.5mm from the surface


New blade



Rebar and threaded rod
flush cut at 3.5mm from
the surface

Cutting Capacity
Dia.: 10 - 25 mm

3.5mm

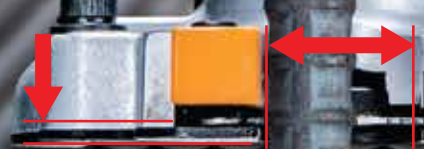

Easy installation of nuts
without deburring

ADT + BL MOTOR

Automatically changes the cutting
speed according to load condition
for an optimum operation

High power
Brushless Motor




Battery fuel gauge

Highly visible
heavy-duty
fluorescent
material guide



Dust bag holder



Dust bag for
collection of
metal dust and
shavings.



Three position
adjustable side
handle for
operator comfort
and convenience.



Surface treatment
of base cover
prevents abrasion

Accessories

TCT Saw Blade
Blade Diameter
110mm



Part No.
SC09003260
SC09003261 (North America)

Cutting Capacity SD345(490N/mm ²)	Work volume on a single full battery charge
D25	about 50 cuts
D19	about 90 cuts
D16	about 135 cuts
D13	about 200 cuts
D10	about 300 cuts

(with BL1850B)

Cordless Steel Rod Cutter

Carrying Case

Standard Equipment :

DSC251ZK :
Grip 36 complete-153489-2(1), DUST CASE-SC08106610(1), PLASTIC
CASE-SC09009190 (1), LONG HEX WRENCH M5-SC08200100(1), EFFICUT
METAL FOR METAL CUTTING-E-11097(1)

DSC251

Blade Diameter	110 mm (4.3")
Cutting Capacity	Dia.: 10 - 25 mm (3/8" - 1")
No load speed (rpm)	2,200
Vibration Level	Cutting Rebar: 2.5 m/s ² or less
Sound Pressure Level	78dB(A)
Dimensions (L x W x H)	471x137x139mm (18-17/32"x5-25/64"x5-15/32")
Net weight	4.0 kg (8.82 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014.
Items of standard equipment and specifications may vary by country or area.

Cutting capacity range of
10 - 25 mm standard rebar

ADT

**BL
MOTOR**

**18V
LITHIUM-ION**



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Korlur village, Kasaba Hobli, Hoskote Taluk,
Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in