



**GA4100** ( 100 mm (4"), 850 W )  
**GA5100** ( 125 mm (5"), 850 W )  
**Angle Grinder**

# Soft start and Anti-restart function

# POWERFUL 850W



## Anti - Restart Function



Prevents accidental start-up by ensuring the tool does not automatically restart when power is restored, even if the switch is left in the "ON" position during power cuts or blackouts.




Number	Speed : rpm
1	2,800
2	4,000
3	6,000
4	8,000
5	11,000

## Speed Adjustment Dial

Allows stepless speed control from 1-5 to suit the application.

### Angle Grinder

### GA4100 / GA5100

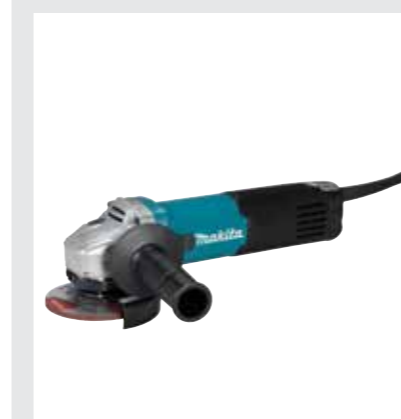

Specification :	GA4100	GA5100
Carbon Brush	CB-325 194074-2(1)	CB-325 194074-2(1)
Continuous Rating Input	850 W	850 W
Wheel diameter	100 mm (4")	125 mm (5")
Hole diameter	16 mm (5/8")	22.23 mm (7/8")
No load speed	2,800 - 11,000 min <sup>-1</sup>	2,800 - 11,000 min <sup>-1</sup>
Cutting depth	20 mm (13/16 ")	33 mm (1-5/16 ")
Dimensions (L x W x H)	298 x 118 x 105 mm (11-3/4 x 4-5/8 x 4-1/8")	298 x 140 x 111 mm (11-3/4 x 5-1/2 x 4-3/8")
Net weight	2.0 kg	2.0 kg
Power supply cord	2.5 m	2.5 m

- Double Insulation
- Variable Speed
- Anti-Restart Function
- Soft Start
- Constant Speed

#### Standard Equipment :

- GA4100: Grip 36 complete: 153489-2(1), Cutting wheel cover attachment 100: 191V54-1(1)  
Lock nut wrench 20: 782420-7(1), GRINDING WHEEL 100x6 A24R: D-18443(1)
- GA5100: Grip 36 complete: 153489-2(1), Cutting wheel cover attachment 125:199710-5(1)  
Lock nut wrench 35: 782423-1(1), GRINDING WHEEL 125x6 A24R: D-18465(1)



**Makita Power Tools India Pvt. Ltd.**  
 Unit II, Sy. Nos. 93/3 & 93/4, Koralur Village, Kasaba Hobli,  
 Hoskote Taluk, Bengaluru - 560067

Email: [info@makita.in](mailto:info@makita.in)  
 Website: [www.makita.in](http://www.makita.in)